



PowerFirst Technology Company Limited

深圳市顶尖电源科技有限公司

Address: Lantian Bld., Kaitian Science Park, Pinghu Street, Shenzhen, China.

地址: 深圳市龙岗区平湖街道平安大道108号开田科学园蓝田大厦

Tel: +86 755 28441619 / Email: marketing@epowerfirst.com Web: www.epowerfirst.com

Technical Specification for 360W Portable Charger (Confidential)

CONTENTS:

1 INTRODUCTION 1

2 DOCUMENT HISTORY 1


3 SPECIFICATION..... 1-3

4 PRODUCT OUTLINE DRAWING 3

5 CHARGING ALGORITHMS 4-5

1 INTRODUCTION

This document specifies the requirements for the 360W portable charger, it is a fan-cooling model. Dip-switches are used to select the commonly-used charging algorithms, the default setting is marked with “■”.

1#  IU1a-Acd for Wet traction batteries

2#  IU1a-GEL for Gel or AGM

3#  IUUa-GEL for Gel or AGM

4#  CC-CV for Lithium-ion

Below product pictures are for reference only, it is based on the standard specification sheet, physical product might have minor change subject to customer’s specific request.



2 DOCUMENT HISTORY

Table 2-1 Document History

Version	Date	Change record	Creator
V.01	15.06.09	Initial version	PowerFirst

3 SPECIFICATION

Table 3-1 Specification

No	Item	Technical specification	Remark
1	Rated input voltage	100 -240 VAC +/-10%, stepless change	Universal wide range
2	AC frequency	50-60Hz	Universal
3	Peak efficiency	91% @230VAC/24VDC, 89% @120VAC/24VDC	
4	Power factor	>0.98 @ 230VAC, >0.99 @ 120VAC	Advanced Active PFC

版权所有，不得复印! All copyright protected by PowerFirst, no any part of this specification allowed to be copied.

努力成为世界顶尖的充电器品牌生产商! A Global Leader in Charger Manufacture!




PowerFirst Technology Company Limited

深圳市顶尖电源科技有限公司

Address: Lantian Bld., Kaitian Science Park, Pinghu Street, Shenzhen, China.

地址: 深圳市龙岗区平湖街道平安大道108号开田科学园蓝田大厦

Tel: +86 755 28441619 / Email: marketing@epowerfirst.com Web: www.epowerfirst.com**Technical Specification for 360W Portable Charger (Confidential)**

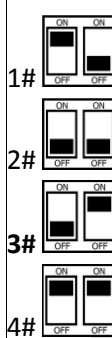No	Item	Technical specification	Remark
5	Nominal output voltage	24V	12V / 36V / 48V models optional
6	Bulk charge (CC)	12A or 10A until 28.8V(2.4vpc), then switch to CV at 28.8V(2.4vpc)	Constant Current
7	Absorption charge (CV)	Hold at 28.8V (2.4vpc at battery end), and terminates when current tapers to 0.8A	Constant Voltage
8	Float charge	27V (2.25vpc), no time limit	Constant Voltage
9	Interlock function	Normally-closed (NC), max. 5A Wires: 2 * 1mm ² * 20cm, Red and Black Connector: customizable	Optional, customizable
10	Remote LED extension	Connector customizable	Optional, customizable
11	Charge algorithms	 <p>1# IU1a-Acd for Wet traction batteries</p> <p>2# IU1a-GEL for Gel or AGM</p> <p>3# IUUa-GEL for Gel or AGM</p> <p>4# CC-CV for Lithium-ion</p>	Take out the cap on the housing, set charging profile by the dip-switches
12	Line loss compensation	Based on 2 meters output cable's length	
13	Short circuit protection	Short circuit protection with auto-reset	
14	Reverse polarity protection	Reverse polarity protection with auto-reset	
15	Additional protection	Sparks protection AC surge protection with auto-reset Over temperature protection with auto-reset	
16	DC output power cord (customizable)	Cable: 2 * 2.5mm ² * 1000mm Connector: customizable	
17	AC input power cord (customizable)	Connector: IEC320 / C14 installed on the housing	
18	LED instruction	Red: On = Fault Yellow: On=Charging Green: On=Fully charged	Customizable
19	Regulatory compliant	Safety (LVD): EN60335-2-29, UL1564, CSA 107.2 Emissions (EMC): EN55014 Immunity (EMC): EN61000-3-2, EN61000-3-3	LVD, RE, CE, Harmonic, Flicker, ESD, RS, CS, EFT, Surge, DIP, PFM included



PowerFirst Technology Company Limited

深圳市顶尖电源科技有限公司

Address: Lantian Bld., Kaitian Science Park, Pinghu Street, Shenzhen, China.

地址: 深圳市龙岗区平湖街道平安大道108号开田科学园蓝田大厦


Tel: +86 755 28441619 / Email: marketing@epowerfirst.com Web: www.epowerfirst.com

Technical Specification for 360W Portable Charger (Confidential)



No	Item	Technical specification	Remark
20	Cooling method	Fan-cooling with long-life fan	
21	Operating temperature	-10°C to +50°C (14°F to 122°F)	
22	Storage temperature	-20°C to +65°C (-4°F to 149°F)	
23	Mechanical fixing	Portable as default	
24	Dimensions	L260 x W242 x H70 mm	
25	Weight	2Kg	Maybe some tolerance
26	Color	Grey	Customizable

4. PRODUCT OUTLINE DRAWING


5. CHARGING ALGORITHMS



1# IU1a-Acd for Wet traction batteries

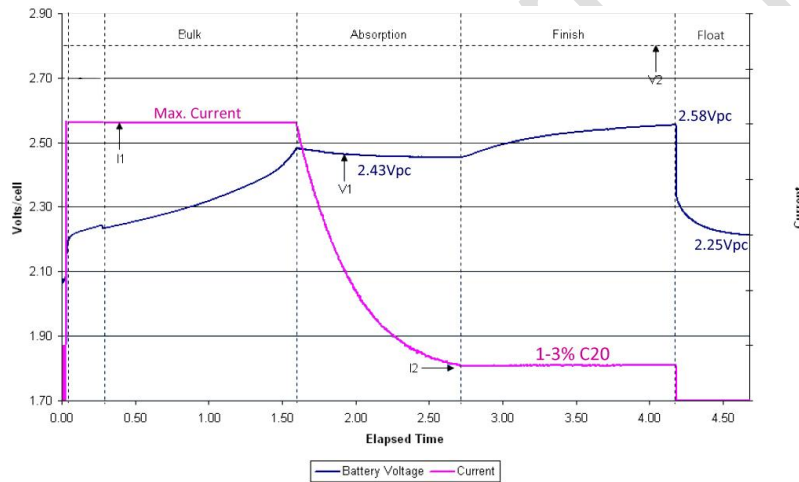

2# IU1a-GEL for Gel or AGM

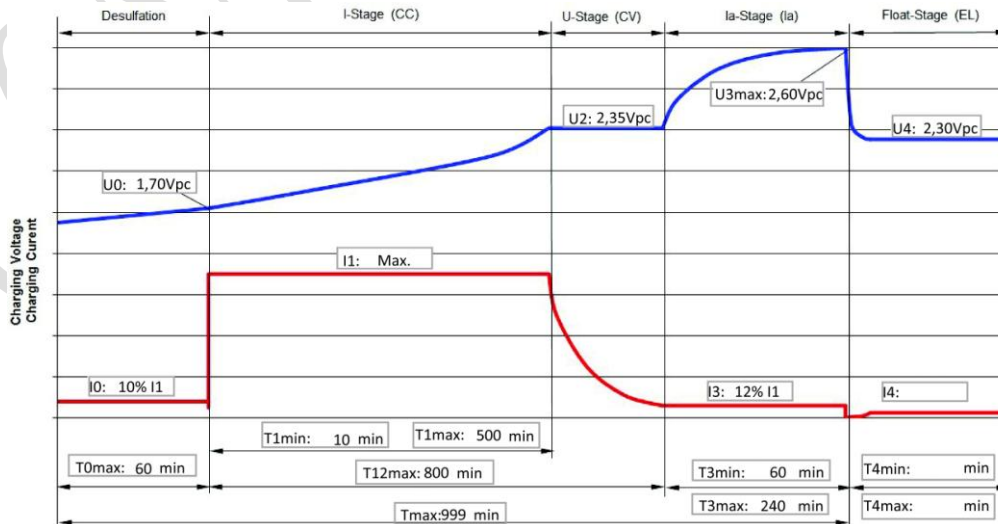



PowerFirst Technology Company Limited

深圳市顶尖电源科技有限公司


Address: Lantian Bld., Kaitian Science Park, Pinghu Street, Shenzhen, China.

地址: 深圳市龙岗区平湖街道平安大道108号开田科学园蓝田大厦

Tel: +86 755 28441619 / Email: marketing@epowerfirst.com Web: www.epowerfirst.com

Technical Specification for 360W Portable Charger (Confidential)

3# IUUa-GEL for Gel or AGM

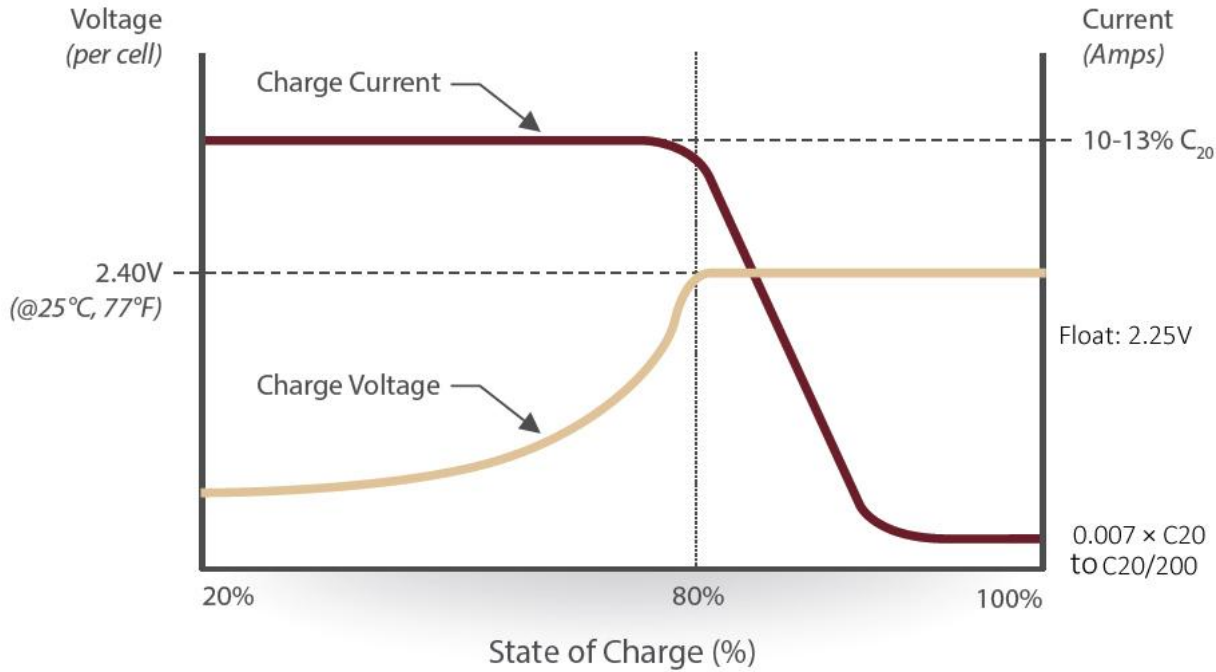

4# CC-CV for Lithium-ion

